

PERFORMANCE LINE

PA-6020Z

Order No. 1000126




20-zone mono PA mixing amplifier

- 1 x 600 W
- 20 zones, can be controlled individually
- 3 inputs microphone/line via comb. jacks
- 2 inputs stereo line via RCA jacks
- Chime, continuous sound and wailing sound, autom. mute, 2-tone chime or 4-tone chime (selectable)
- Bass, treble and master controls, LEDs for indicating signal/clip, regulated fan
- Insertions for various functions are available at option
- 15 V phantom power for electret microphones
- Connection for up to 32 x zone paging microphone PA-2400RC
- Connection for up to 3 x push-to-talk mic. PA-4300PTT



- Alarm announcement with insertion PA-1120DMT (available at option)
- Mains operation and 24 V emergency power operation
- Removable mounting brackets

Model	PA-6020Z
Power rating	600 W
Power rating at 100 V	600 W
Inputs	2.5 mV/5 kΩ, 0.3 V/5 kΩ (mic/line 1-3), 0.3 V/15 kΩ (line 4-5), 0.775 V/100 kΩ (preamplifier)
Frequency range	55-16,000 Hz
Equalizer bass	±10 dB/100 Hz
Equalizer treble	±10 dB/10 kHz
S/N ratio	> 70 dB (mic), > 80 dB (line)
THD	< 1%
Power supply	~ 230 V/50 Hz/1,700 VA, ~ 24 V/50 A
Dimensions	482 x 133 x 352 mm, 3 RS
Weight	21 kg

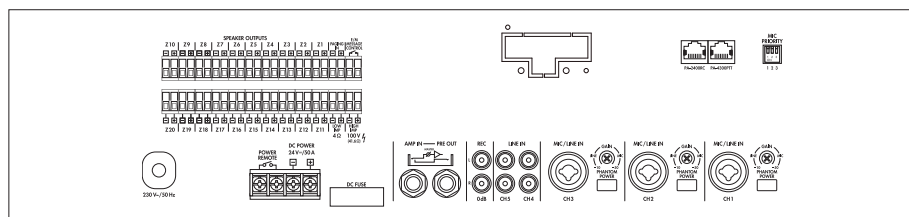

PA-6010Z

Order No. 1000125




10-zone mono PA mixing amplifier

- 1 x 600 W
- 10 zones, can be controlled individually
- 3 inputs microphone/line via comb. jacks
- 2 inputs stereo line via RCA jacks
- Chime, continuous sound and wailing sound, autom. mute, 2-tone chime or 4-tone chime (selectable)
- Bass, treble and master controls, LEDs for indicating signal/clip, regulated fan
- Insertions for various functions are available at option
- 15 V phantom power for electret microphones
- Connection for up to 32 x zone paging mic. PA-2400RC
- Connection for up to 3 x push-to-talk microphone PA-4300PTT



- Alarm announcement with insertion PA-1120DMT (available at option)
- Mains operation and 24 V emergency power operation
- Removable mounting brackets

Model	PA-6010Z
Power rating	600 W
Power rating at 100 V	600 W
Inputs	2.5 mV/5 kΩ, 0.3 V/5 kΩ (mic/line 1-3), 0.3 V/15 kΩ (line 4-5), 0.775 V/100 kΩ (preamplifier)
Frequency range	55-16,000 Hz
Equalizer bass	±10 dB/100 Hz
Equalizer treble	±10 dB/10 kHz
S/N ratio	> 70 dB (mic), > 80 dB (line)
THD	< 1%
Power supply	~ 230 V/50 Hz/1,700 VA, ~ 24 V/50 A
Dimensions	482 x 133 x 352 mm, 3 RS
Weight	22 kg

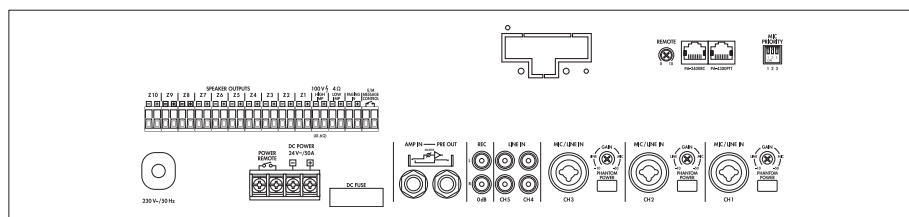

PA-2400RC

Order No. 0236840

PA zone paging desktop microphone, for connection to PA-1120, PA-1240, PA-2420Z, PA-6010Z or PA-6020Z.

- Selection buttons for speaker zones 1-20
- Start/stop function for 6 selectable announcements which are stored in the digital module PA-1120DMT, available at option
- LED indication for various functions
- Automatic chime via microphone announcement button

- Adjustable microphone sensitivity
- 24 V power supply via PA-2410Z, PA-2420Z
- RJ45 jacks for connection to additional PA-2400RC with slave/priority switch
- Up to 3 x PA-2400RC can be connected to PA-2410Z or PA-2420Z
- Supplied with 3 m connection cable (Cat. 5e)

